

Mégane

6 Sealing and soundproofing

64 BODY SEALING

Sealing and soundproofing

Contents

Pages


64	WINDOW SEALING
	Windscreen pillar seal

64-1

BODY SEALING


Windscreen pillar seal

64

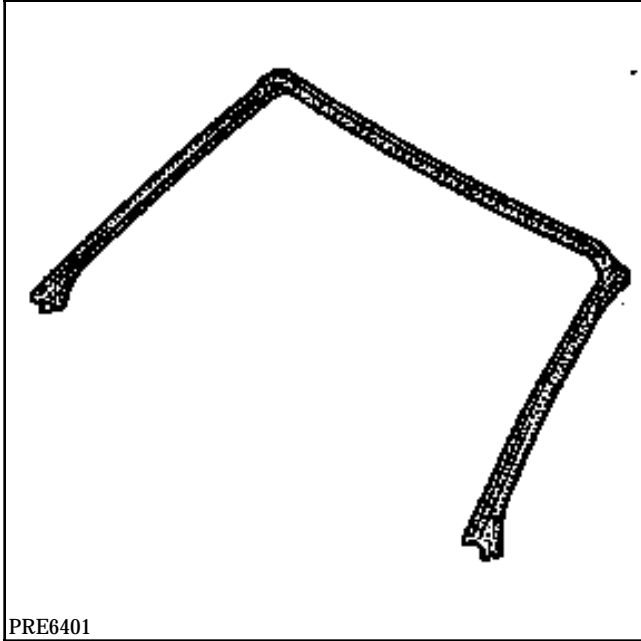


REMOVAL - REFITTING

After removing the front locks and the trims, remove the seal.

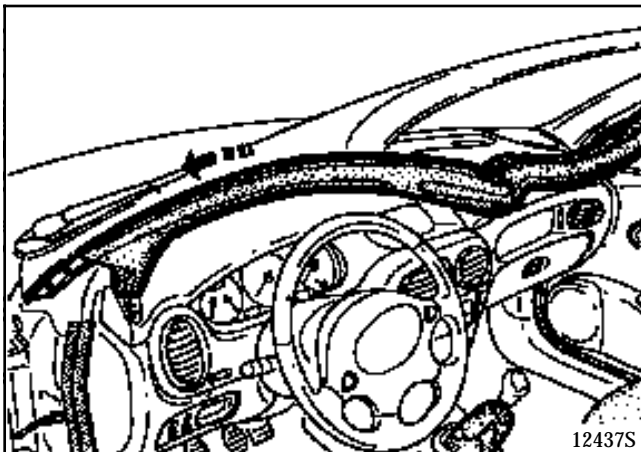

Moisten the seal (glass cleaner, soapy water).

Engage the seal in the retaining formed section groove.

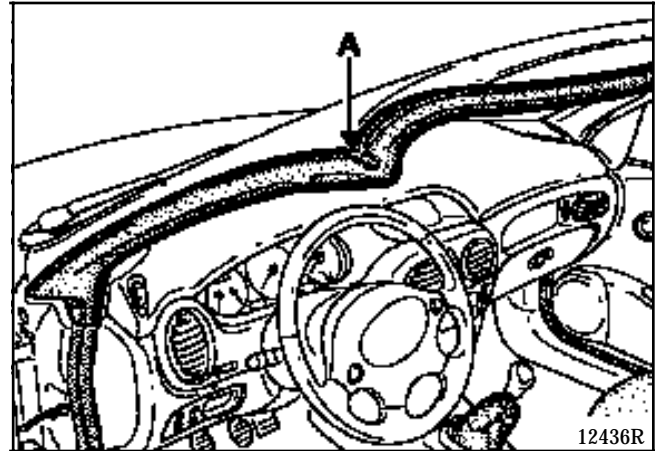

Slide the seal so that the end (A) is positioned with the corner of the windscreen aperture.

Close and lock the hood.

Check the sideways alignment with the hood seal.

A clearance of **1 mm** must be obtained between the seals (longitudinal clearance).